PCT

(51) International Patent Classification 6 : H04L 27/06, 27/22, 27/08, 7/00	A1	(11) International Publication Number: WO 97/03509 (43) International Publication Date: 30 January 1997 (30.01.97)

(21) International Application Number: PCT/US96/11109

(22) International Filing Date: 28 June 1996 (28.06.96)

(30) Priority Data:
501,361   12 July 1995 (12.07.95)   US

(71) Applicant: THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 10330 North Meridian Street, Indianapolis, IN 46290-1024 (US).

(72) Inventor: STEWART, John, Sidney; 3655 West 71st Street, Indianapolis, IN 46268 (US).

(74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.
With amended claims.

(54) Title: APPARATUS FOR DEMODULATING AND DECODING VIDEO SIGNALS

(57) Abstract

An adaptive receiver includes an adaptive demodulator (10) and an adaptive decoder (12) for providing demodulated and decoded output data from a video signal encoded for satellite, terrestrial or cable transmission. The demodulator recovers demodulated output data by using an adaptive timing recovery network (25) and an adaptive carrier recovery network (25) that incorporates a selectable slicer network (30, 35, 40). In addition, an Automatic Gain Control network (25) within the demodulator provides a gain control output as a function of a difference between signals produced both prior to and following the slicer. The demodulator may also incorporate a signal quality detector that uses carrier recovery network signals to provide an estimate of the error in the demodulated output data. The decoder produces a Viterbi decoded output from the demodulated output data by using a selectable code rate Viterbi decoder.

APPARATUS FOR DEMODULATING AND DECODING VIDEO SIGNALS

This invention is related to the field of digital signal
5   processing, and more particularly to demodulation and decoding of video
signals encoded to different standards for satellite or terrestrial
transmission, for example.

Digital television systems used for terrestrial or satellite
10   broadcast modulate and encode television signals for transmission by
different methods and in different signal formats. The particular method
and format adopted may be prescribed by an internationally recognized
specification. One such specification, prepared for a European satellite
communications system, is the "Specification of the Baseline
15   Modulation/Channel Coding System for Digital Multi-Programme
Television by Satellite" by the European Broadcasting Union, 19th Nov.
1993. This system is also known as the Direct Video Broadcast (DVB)
system and covers both satellite and cable television signal distribution.
Another transmission system, already in use in the United States and
20   defined by a proprietary commercial specification, is the Digital Satellite
System (DSS). However, whether the transmitted signal format is
prescribed by a recognized standard or a proprietary commercial
specification, a video signal receiver must be capable of receiving the
transmitted signal format. A system for receiving different transmitted
25   signal formats in the context of different types of transmission such as
satellite, terrestrial and cable transmission is disclosed in U.S. Patent No.
5,497,401, entitled "A Branch Metric Computer for a Viterbi Decoder of a
Punctured and Pragmatic Trellis Code Convolutional Decoder Suitable For
Use in a Multi-Channel Receiver of Satellite, Terrestrial and Cable
30   Transmitted FEC Compressed-Digital Television Data" by J. S. Stewart et al.
A video signal receiver employs demodulation and decoding
functions that are specifically related to the signal format to be received.
The demodulation function depends on the type of modulation, the signal
shape, the data rate employed by the transmission system, and whether a
35   single or differential output is required. The decoding function depends
on the type of encoding, scrambling, interleaving and the code rate
employed by the transmission system encoder.

In accordance with the present invention it is recognized that
40   a signal processing network can advantageously accommodate multiple

demodulation and decoding functions in the context of a digital television signal processing system, for example. In accordance with the principles of the invention, a disclosed digital signal processing network provides adaptive demodulation and decoding networks incorporating different 5 types of demodulation and decoding functions.

In a system for receiving and adaptively processing a carrier signal modulated with video information in one of several possible modulation formats suitable for satellite, terrestrial or cable transmission 10 for example, an adaptive demodulator in accordance with the principles of the invention recovers the video information. The demodulator includes a timing recovery network for recovering timing data from the modulated carrier signal. The demodulator also includes an adaptive carrier recovery network that uses this timing data to recover the video 15 information. Within the carrier recovery network a selectable slicer network applies one of several possible sets of decision thresholds to data produced by the carrier recovery network to recover the video information.

20 In accordance with a feature of the invention, an adaptive decoder provides decoded output data from the recovered video information.

In accordance with another feature of the invention, a signal 25 quality detector uses carrier recovery network signals to provide an estimate of the error in the recovered video information. The adaptive carrier recovery network is automatically configured to be compatible with the video modulated carrier in response to the error estimate.

30 *Brief Description of the Drawings*

In the drawing:
Figure 1 is a block diagram of apparatus according to the principles of the invention for adaptively demodulating and decoding 35 signals encoded in DSS and DVB formats.

Figure 2 is a block diagram showing the elements of Figure 1 configured to demodulate and decode a DSS satellite signal format.

Figure 3 is a block diagram showing the elements of Figure 1 configured to demodulate and decode a DVB satellite signal format.

Figure 4 is a block diagram showing the function elements of 5 Figure 1 configured to demodulate and decode a DVB cable signal format.

Figure 5 is a more detailed block diagram of the demodulating apparatus of Figure 1.

10 Figure 6 is a block diagram showing the AGC error computation function of the demodulating apparatus of Figure 5.

A system according to the invention for demodulating and decoding signals of different signal format such as satellite and cable 15 television signals is shown in Figure 1. In particular, this system is configurable to demodulate and decode signals in DSS satellite, DVB satellite or DVB cable signal formats. This configurability has been achieved by maximizing the use of functions common to the demodulation and decoding process of the three signal formats. It has also been 20 achieved through appropriate selection, implementation and interfacing of the demodulation and decoding functions.

In Figure 1, a carrier modulated with video data is received by an antenna 15, processed and digitized by network 20. The resultant 25 digital output signal is demodulated by demodulator 10 and decoded by decoder 12. The output from decoder 12 is further processed to provide decompressed output video data suitable for display by a display device. Both demodulator 10 and decoder 12 are adaptive demodulation and decoding networks incorporating different types of demodulation and 30 decoding functions which are selected by microcontroller 105 via interface 100. Both demodulator 10 and decoder 12 are configured by a Control signal from microcontroller interface 100. The status of the Control signal provided by interface 100 is determined by signals provided by microcontroller 105 to interface 100. In Figure 2, 35 demodulator 10 and decoder 12 of Figure 1 are configured to receive a DSS satellite signal format. In Figures 3 and 4, demodulator 10 and decoder 12 of Figure 1 are configured to receive DVB satellite and DVB cable signal formats respectively. Both configurable demodulator 10 and

configurable decoder 12 may be advantageously accommodated in a single signal processing device such as an integrated circuit, for example.

5   Configurable demodulator 10 provides the functions required for demodulating each of the DSS and DVB signal formats. The primary functions of demodulator 10 are recovery and tracking of the carrier frequency, recovery of the transmitted data clock frequency, and recovery of the video data itself. In addition, the demodulator includes an AGC network (Figure 5) to appropriately scale analog input data prior to
10   analog to digital conversion in unit 20. The demodulator functions are implemented by units 25, 30, 35, 40 and 45. Timing recovery, carrier recovery, slicer and differential decoder operations are individually known and generally described, for example, in the reference text *Digital Communication*, Lee and Messerschmidt (Kluwer Academic Press, Boston,
15   MA, USA, 1988).

The different functional characteristics exhibited by demodulator 10 in the three signal format modes are shown in Table I.

20   Table I.   Demodulator 10 functions in DSS and DVB modes.

	DSS	DVB satellite	DVB cable
Clock rate	rate 1	rate 2	rate 3
Feed Forward Equalization	No	No	Yes
Decision Feedback Equalization	No	No	Yes
Excess Bandwidth Factor	20%	35%	15%
Modulation type	QPSK	QPSK	QAM
Selectable signal constellation	No	No	Yes 64 point or 256 point
Differential output decoding	No	No	Yes

Demodulator 10 accommodates differences in data clock rate, Feed Forward Equalization, Decision Feedback Equalization, Excess Bandwidth Factor (EBF), modulation type, symbol constellations and
25   decoding for the three input signal formats listed in Table I. The

difference in clock rate is accommodated by ensuring the system is capable of operating at the highest and lowest data clock frequencies of the three input signal formats. The other differences are accommodated by configuring the demodulation functions concerned as described below.

5

Figure 5 depicts demodulator 10 of Figure 1 in greater detail. In Figure 5, an input signal from antenna 15 is received, converted to digital form and processed by input network 20. Network 20 includes radio frequency (RF) tuner and intermediate frequency (IF) mixer and

10   amplification stages 200 for down-converting the input video signal to a lower frequency band suitable for further processing. Network 20 also includes a gain controlled amplifier 205 and a phase splitting network 207. The phase splitting network splits the received video signal into quadrature I and Q components. Amplifier 205 appropriately scales the I

15   and Q components for digitization by analog to digital converters 210 within network 20. An Automatic Gain Control (AGC) signal for amplifier 205 is provided by AGC error detector network 270 described later. A digital signal from unit 210 is provided to multiplexer 215 of demodulator 10.

20

In satellite mode (DSS or DVB), multiplexer 215, as determined by the Control signal, steers the digitized video signals from network 20 to rotator 225 and bypasses a Feed Forward Equalizer (FFE) within unit 220. In cable mode, multiplexer 215, as determined by the

25   Control signal, steers the digitized signals to rotator 225 (e.g., a complex multiplier) via the Feed Forward Equalizer of unit 220. The Feed Forward Equalizer is an adaptive FIR type digital filter and compensates for transmission channel perturbations such as frequency/phase irregularities.

30

The output data from multiplexer 215 is processed by a carrier recovery loop comprised of units 225, 220, 230, 30, 35, 40, 265, 260 and 255 for recovering the baseband video information. The data from unit 215 is a symbol sequence in the form of complex I and Q

35   quadrature components at the input to carrier recovery loop rotator 225. This symbol sequence is a binary data sequence where each symbol is represented by assigned digital values. The set of symbols may be represented in a complex plane as a set of points called a signal constellation, as known. The DSS and DVB satellite signal formats use a

Quadrature Phase Shift Keying (QPSK) symbol constellation of 4 points, and the DVB cable signal format uses a Quadrature Amplitude Modulated (QAM) symbol constellation of either 64 or 256 points. The carrier recovery loop compensates for symbol point offset and symbol point
5   rotation caused by phase and frequency jitter in the carrier frequency introduced by the transmission channel. This is accomplished by deriving an error signal from recovered data, followed by applying the error signal to the loop input data to compensate for the phase and frequency jitter using a complex multiplier (rotator 225). The functions of the carrier
10   recovery loop elements are each performed for both the I and Q complex signal components, using known signal processing techniques.

The complex multiplier function of rotator 225 multiplies the unit 215 output data by compensation components from Voltage
15   Controlled Oscillator (VCO) 255 to produce compensated data as an output. The compensated data from rotator 225 is passed to slicers 30 and 35 via multiplexer 230. In a satellite mode, the Control signal causes multiplexer 230 to bypass the decision feedback equalizer (DFE) of unit 220. In contrast, in cable mode, the Control signal causes multiplexer 230 to steer
20   the compensated data from rotator 225 to the DFE within unit 220. The DFE sums this compensated data from rotator 225 with a delayed, scaled version of the selected slicer output from multiplexer 40. This summing operation is a known decision feedback equalization process and reduces inter-symbol interference in the compensated data output of rotator 225.
25   In those applications where such interference is not significant the DFE may be omitted. The feedback equalized data from unit 220 is returned to multiplexer 230 and passed to slicers 30, 35 and Viterbi unit 50 of decoder 12.

30   Both multiplexers 230 and 215 may be part of equalizer 220, or eliminated if a fixed satellite, terrestrial or cable demodulation configuration is desired. In addition, although both the FFE and the DFE equalizers of unit 220 are shown external to demodulator 10, they may be included with demodulator 10 in a single integrated circuit network
35   In that case, the adaptive FFE and DFE equalizers may be configured for a particular mode by programming appropriate filter coefficients using the Control signal.

7

As indicated in Table I, the satellite input signal formats are QPSK modulated and the cable input signal format is a QAM type. The particular slicer used in the system is selected by the configuration Control signal via multiplexer 40 depending on whether the input signal

5   format is a satellite QPSK or cable QAM type. In addition, in the cable mode, the QAM slicer 35 is also configured for the particular QAM symbol constellation involved, as indicated in Table I. Then, slicer 35 exhibits either a 64 point or 256 point constellation slicer function in response to the configuration Control signal.

10

The corrected output from multiplexer 230, which is unequalized in satellite mode and feedback equalized in cable mode, is passed to slicers 30 and 35. Slicer 30 processes the corrected output from multiplexer 230 to recover data from Quadrature Phase Shift Keying

15   (QPSK) modulated signals. Similarly, slicer 35 recovers data from QAM signals. Slicers 30 and 35 apply a series of decision thresholds to the corrected output from multiplexer 230 in order to recover the symbol sequence of the original demodulator 10 input data. Then, in satellite mode, the data used by the receiver is recovered from the corrected

20   output of multiplexer 230 by Viterbi detection units 50 and 60 of decoder 12 (Figure 1). In contrast, in cable mode, the recovered data used by the receiver is provided by the selected slicer (30 or 35) and output by multiplexer 40. The output of multiplexer 40 is differentially decoded by unit 45 and passed to multiplexer 65 of decoder 12 (Figure 1). In cable

25   mode, multiplexer 65 (Figure 1) responds to the Control signal by selecting the differential decoded output from unit 45 for further processing, and bypasses Viterbi decoder units 50 and 60 in Figure 1. Differential encoding/decoding is a known technique used (in cable mode) to overcome the problem associated with potential phase ambiguity in the

30   derived carrier and recovered symbol constellation. The recovered data output from multiplexer 40 is used in both satellite and cable modes by the carrier recovery loop, timing recovery network, signal quality detector and AGC functions of demodulator 10.

35   Continuing with Figure 5, the input to slicers 30, 35 and recovered data output from multiplexer 40 are processed by carrier recovery loop phase error detector 265, low pass filter 260 and VCO 255, to provide the I and Q feedback compensation signal components used by rotator 225. Phase detector 265 determines an error signal representing

the phase and frequency difference between the input to slicers 30 and 35, and the slicer output from multiplexer 40. This error signal is low pass filtered by unit 260 and is used by VCO 255 (as known) to generate I and Q quadrature compensation components which are applied by rotator 225 to provide error compensated signals to multiplexer 230. By this means the signals applied to multiplexer 230 are compensated for phase and frequency errors associated with symbol point offset and symbol point rotation introduced during transmission.

The input to slicers 30, 35 and the recovered data output signal from multiplexer 40 are also used by AGC error detector 270 to form a gain control signal. This control signal controls the gain of amplifier 205 in processor 20, and ensures that the I and Q input signals to the analog to digital converters of processor 20 are appropriately scaled as required for proper analog to digital conversion. Detector 270 computes an error based on the difference between the sum of the squares of the quadrature components of the signal input to slicers 30, 35 (Im, Qm), and the sum of the squares of the quadrature components of the output from multiplexer 40 (Is, Qs).

Figure 6 shows an implementation of the AGC error computation function within detector 270. The slicer 30, 35 quadrature input components Im, Qm from multiplexer 230 are squared by multipliers 300 and 305 and summed by adder 315. In addition, the quadrature components Is, Qs of the recovered data output from multiplexer 40 are used to access a stored value in a look-up table in memory 310. This stored value represents the sum of the squared values of Is and Qs. The stored value from memory 310 is then subtracted from the output of adder 315 by subtractor 320 to produce the resultant AGC error. The computed AGC error used by detector 270 in the Figure 6 implementation is given by:

$$\text{AGC error} = (\text{Im}^2 + \text{Qm}^2) - (\text{Iss}^2 + \text{Qss}^2).$$

The term $(\text{Im}^2 + \text{Qm}^2)$ is obtained from unit 315 and the term $(\text{Iss}^2 + \text{Qss}^2)$ is obtained from look-up table 310 as an approximation of $(\text{Is}^2 + \text{Qs}^2)$ using Is and Qs as input pointers. This AGC error has the advantage of being a function of the difference in vector distance between the Im, Qm point and the Is, Qs point with respect to an origin (0,0) point. It also

has the advantage of being independent of angular difference between vectors represented by the Im, Qm and Is, Qs quadrature components. Because the AGC error signal exhibits these characteristics, it may be low pass filtered and used for controlling the gain of AGC amplifier 205.

This AGC error computation is used in preference to the actual error to reduce computational complexity. The actual AGC error is given by:

$$\text{Actual AGC error} = \sqrt{(Im^2 + Qm^2)} - \sqrt{(Is^2 + Qs^2)}$$

As an alternative, the actual error function or another modified version of the actual error function may be used instead of the Figure 6 AGC error signal implementation.

The computed AGC error signal is low pass filtered within detector 270 of Figure 5 to produce an output signal for controlling the gain of amplifier 205. The AGC error signal is also provided to signal quality detector unit 275.

Signal quality detector 275 estimates the signal to noise ratio (SNR) of the input signal to demodulator 10 using the AGC error signal provided by unit 270. Unit 270 first forms the absolute value of the AGC error signal. Then unit 270 applies decision thresholds to the result to determine whether the AGC error lies within a programmed range of values. This provides a determination of the magnitude of the AGC error value which corresponds to an estimate of SNR value. This SNR estimate is provided to microcontroller 105 via interface 100 in Figure 1. Microcontroller 105 is programmed to determine whether the SNR value lies outside a predetermined range. If the SNR value is outside the predetermined range, microcontroller 105 may re-configure the system including all the configurable elements of demodulator 10, equalizer 220 and decoder 12 for a different input signal format. In this way, microcontroller 105 may iteratively re-configure demodulator 10 and decoder 12 functions by using the Control signal via interface 100 to appropriately demodulate and decode the applied input signal format. This configuration function may be programmed to be performed as part of an initialization procedure or in response to an input signal to the

microcontroller from an operator accessible switch, for example. In addition, signal quality detector 275 may use other methods for making an estimate of error or SNR in the demodulated data. These methods include, for example, a mean squared error calculation between the pre-
5   slicer and post-slicer data in the carrier recovery loop. A mean squared error calculation and other error estimation methods are described in *Digital Communication*, Lee and Messerschmidt (Kluwer Academic Press, Boston, MA, USA, 1988) and other texts.

10   The sampling and synchronization clocks used by demodulator 10 in Figure 5 are generated by elements including filter 235, symbol timing recovery unit 240 and output processor 250. The outputs from the analog to digital converters 210 of processor 20 are band pass filtered by configurable filter 235 to compensate for variations in Excess Bandwidth
15 (EB) as expressed by the Excess Bandwidth Factor (EBF). Although the preferred embodiment uses a band pass filter, other filter characteristics such as a low pass filter may be used for EBF compensation. The resulting output, the input signals to slicers 30 and 35, and the selected slicer output of multiplexer 40 are used by timing recovery unit 240 to
20 generate the sampling and synchronization clocks. These recovered clocks correspond to transmitter clocks and are used for timing the operation of demodulator 10, processor 20 (in particular the analog to digital conversion), and equalizer 220.

25   In deriving the required timing information, the timing elements of Figure 5 use a digital signal from analog to digital converters 210. Although the signal prior to digitization by converters 210 exhibits the same raised cosine shape for all three signal formats, the variations in Excess Bandwidth Factor (EBF) detailed in Table I may alter this shape.
30 The EBF is a parameter indicating the degree to which the actual system bandwidth exceeds the minimum bandwidth required to ensure accurate signal recovery. Both the EBF and the raised cosine shape are described in the reference text *Digital Communication*, mentioned previously. The variation in EBF between the input signal formats may cause an error in
35 the recovered timing clocks. In order to compensate for this timing error, the I and Q outputs from the analog to digital converters 210 are filtered by unit 235 prior to timing and clock generation in unit 240. Filter 235 is programmed by microcontroller 105 via interface 100 to filter the digital video signal from converters 210 for proper clock and timing recovery for

each of the EBF values of the three input signal formats as shown in Table
I. Filter 235 may also be programmed to pass signals without any
filtering, e.g., for test purposes.

5   Within unit 240 the error compensated data from filter 235 is
compared both with the data input to slicers 30, 35 and with the
recovered data output from multiplexer 40. Based on this comparison unit
240 derives a phase and timing error signal which is applied to symbol
timing output processor 250. The signal comparison and derivation of the
10   timing error signal is performed in accordance with known principles as
detailed for example in "BPSK/QPSK Timing-Error Detector for Sampled
Receivers", by F. M. Gardner, I.E.E.E. Transactions on Communications, May
1986. The phase and timing error signal from unit 240 is filtered and
buffered by output processor 250 to provide a control signal to a voltage
15   controlled crystal oscillator (VCXO) device included in unit 250. In the
preferred embodiment the VCXO is a separate device, though an integral
VCXO may be used. The control signal input to the VCXO controls both the
frequency and phase of the sampling and synchronization clock signal
output by the VCXO. This sampling and synchronization clock output is
20   used by analog to digital converters 210 and other demodulator elements.

          In Figure 1, configurable decoder 12 provides the functions
required for decoding the DSS and DVB signal formats. The primary
functions of decoder 12 include a punctured convolutional Viterbi
25 . decoder 50, 60, a symbol to byte mapper 70, a deinterleaver network 75,
80, 85, 90, 95, a Reed-Solomon decoder 110, and a descrambler 115.
These individual functions are known and described, for example, in the
reference text *Digital Communication*, noted previously. The operating
characteristics of the decoder 12 elements are shown in Table II for DSS
30   and DVB modes.

Table II. Decoder 12 functions in DSS and DVB modes.

	DSS	DVB satellite	DVB cable
Data punctured convolutional code rates	2/3 6/7	1/2 2/3 3/4 5/6 7/8	Not applicable
Viterbi decoder	Yes	Yes	No
Symbol to byte mapper	1→8 bits per symbol	1→8 bits per symbol	6→8 (64-QAM) bits per symbol 8→8 (256-QAM) bits per symbol
Deinterleaver type	Ramsey	Forney	Forney
Descrambler	No	Yes	Yes

Decoder 12 accommodates differences in code rate,
5 deinterleaver type, symbol to byte mapping and descrambler
requirements for the three input signal formats, as listed in Table II. The
differences are accommodated by configuring the decoder 12 functions as
described below.

10   Decoder stages 50 and 60 constitute a punctured convolutional
Viterbi decoder capable of decoding the various code rates shown in
Table II. Units 50 and 60 process, decode and error correct the filtered
digital video signal output from unit 25 which is applied to the input of
unit 50. These units provide a first level of correction of random
15 transmission errors. In the DSS satellite signal configuration one of two
possible code rates (2/3 or 6/7) may be selected. In contrast, in the DVB
satellite signal configuration one of five possible code rates (1/2, 2/3, 3/4,
5/6, or 7/8) may be selected. The term "code rate" in this context defines
the error correction overhead carried by the coded data. For example, a
20 code rate of 1/2 means that 2 data bits are encoded for each bit of input
data. Similarly, a code rate of 7/8 means 8 data bits are encoded for each
7 bits of input data. The variable code rate of the transmitted data stream
is achieved by deleting bits from an encoded data stream coded with a
base code rate of 1/2. For example, to achieve a code rate of 2/3 one of

the 4 bits produced by coding 2 input data bits at the 1/2 code rate is deleted leaving 3 bits to be transmitted. The other code rates are achieved using the same principle.

5   Unit 50 includes provisions for synchronization of the video signal input data stream to allow Viterbi decoding and insertion of "place-holder" dummy bits. This is accomplished by using a synchronization state machine which is configured by the Control signal via interface 100 for the particular code being received. Synchronization is achieved by
10   identifying and resolving both bit position and phase ambiguities in the input data stream. The bit position and phase ambiguities are identified by a process of receiving, decoding, re-encoding and comparing the re-encoded data with the input data. Successful synchronization is indicated by an acceptable error rate between re-encoded and original input data.
15   For this process, all the possible states arising from phase and bit position ambiguities in the input signal are tested by the synchronization state machine. If synchronization has not been achieved, an out-of-lock indication is generated by unit 50. This indication causes VCO 255 of demodulator 10 (Figure 5) to insert a code type and configuration
20   dependent phase shift into the input data stream. This synchronization process is repeated until lock is achieved. Although this is the preferred synchronization method, other methods using different operating sequences are also possible.

25   After the data stream has been synchronized as discussed above, replacement "place-holder" dummy bits equal in number to bits deleted at the transmitter are inserted into the data stream. A configurable state machine in unit 50 is used to insert the appropriate "place-holder" dummy bits for the particular code type and code rate of
30   the received data stream. Unit 50 is configured for the selected code rate by loading a register within unit 50 in response to the Control signal conveyed from microcontroller 105 via interface 100. The "place-holder" bit insertion state machine is configured to insert the correct number of place-holder bits for the appropriate code rate selection in response to
35   the loaded register information. Similarly, the Viterbi synchronization network of unit 50 is also appropriately configured using this information. After the "place-holder" bit insertion, a fixed base code rate of 1/2 is output from unit 50. This means that the various transmitted code rates shown in Table II are all decoded using a single Viterbi

decoder 60 that operates at the fixed base code rate (1/2). The "place-holder" bits inserted in unit 50 are identified within Viterbi decoder 60. The information gained from this place-holder bit identification allows the Viterbi decoder algorithm to correctly decode the data. The resultant

5   Viterbi decoder 60 output is provided to multiplexer 65.

In a satellite input signal configuration, the output of Viterbi decoder 60 is provided to symbol to byte mapper 70 by multiplexer 65 in response to the Control signal from interface 100. Mapper 70 converts a

10   single bit output of Viterbi decoder 60 to an 8 bit mapped data byte. Alternatively, in cable signal input configuration the differentially decoded output of unit 45 is provided to mapper 70 by multiplexer 65 in response to the Control signal status. In addition, in cable input signal configuration the function of mapper 70 varies depending on whether a

15   64 or a 256 point symbol constellation is selected. If a 64 point QAM constellation has been selected, mapper 70 converts a 6 bit symbol code for each of the 64 points of the constellation to an 8 bit mapped data byte. In contrast, in the 256 point QAM constellation configuration, mapper 70 converts an 8 bit symbol code for each of the 256 points of

20   the constellation to an 8 bit mapped data byte.

The mapped data output of mapper 70 is provided to synchronization unit 75 and memory 95 for further processing. This mapped data output is interleaved data. That is, data that has been

25   arranged in a prescribed sequence prior to transmission. The purpose of the interleaving operation is to spread or disperse data in time in a predetermined sequence, such that a data loss during transmission does not result in a loss of contiguous data. Instead, any data lost is dispersed and is therefore more easily concealed or corrected. Synchronization unit

30   75 and memory 95 together with deinterleaver address generators 80, 85 and multiplexer 90 constitute a configurable deinterleaver function for restoring data to its original sequence. In DSS mode, a deinterleaving algorithm proposed by Ramsey as described in "Realization of Optimum Interleavers," IEEE Transactions on Information Theory, vol. IT-15, May

35   1970, is used. In contrast, in DVB mode an algorithm proposed by Forney as described in "Burst-Correcting Codes for the Classic Bursty Channel," IEEE Transactions on Communications Technology, vol. COM-19, Oct. 1971, is used.

Synchronization network 75 detects sync words in the interleaved data signal and provides output signals synchronized to the beginning of data. The sync words are not themselves interleaved, but occur at periodic intervals in time. To enable sync word detection,

5   information identifying the sync words and the expected data packet lengths is loaded into registers within unit 75. This information is provided by microcontroller 105 via interface 100 by means of the Control signal. Output synchronization signals from unit 75 are provided to address generators 80 and 85 for synchronizing the address signals

1 0   from units 80 and 85 with the interleaved data from mapper 70. The generated address signals are then applied to memory 95 via multiplexer 90.

In DSS mode, multiplexer 90, in response to the Control signal

1 5   status, applies address signals from generator 80 to memory 95. In DVB mode, multiplexer 90 applies address signals from generator 85 to memory 95 in response to a different Control signal status. Generator 80 is used in the DSS mode to implement the Ramsey deinterleaving function, and generator 85 is used in the DVB mode to implement the

2 0   Forney deinterleaving function. These deinterleaving functions are implemented using logic state machines. Generators 80 and 85 produce a sequence of read and write addresses and associated memory control signals (such as read, write and output enable) which are passed via multiplexer 90 to memory 95. The sequence of write addresses produced

2 5   by generators 80, 85 ensures that the interleaved data from mapper 70 is written into memory locations of memory 95 in the order in which the input interleaved data is received. The sequence of read addresses produced by generators 80, 85 ensures that data is read out of memory 95 in the desired deinterleaved order. The resultant deinterleaved output

3 0   data from memory 95 is provided to Reed-Solomon decoder 110. Additional background information concerning the operation of the configurable deinterleaver function is presented in co-pending U.S. patent application Serial no. 08/346,950, of J. S. Stewart.

3 5   Reed-Solomon decoder 110 operates in all modes of decoder 12 and decodes and error corrects the deinterleaved output data from memory 95. Reed-Solomon decoder 110 is configured by internal registers which are loaded in response to the Control from interface 100. Information loaded into these registers configures unit 110 to decode the

particular packet lengths of data expected in the deinterleaved output
data from memory 95. The information may also include other
configuration parameters such as the number and type of parity bytes
expected in the data, the number of error correction bytes per packet,
5   and parameters selecting the type of Reed-Solomon decoder function
employed, for example.

The Reed-Solomon decoded data output from unit 110 is
provided both to descrambler 115 and to multiplexer 120. In DSS mode,
10   multiplexer 120, in response to the Control signal status, applies the
decoded data from unit 110 to output processor 125. In contrast, in both
cable and satellite DVB modes as shown in Table II, the decoded data
from unit 110 is first descrambled by descrambler 115. In these modes,
multiplexer 120 responds to a different Control signal status and applies
15   the descrambled output from unit 115 to output processor 125. Output
processor 125 processes the output data from multiplexer 120 and
provides Output Data for the system of Figure 1. Processor 125 supplies
the functions necessary to interface the Output Data to other video
receiver processing networks. These functions include conforming the
20   output data to suitable logic levels and providing a clock signal associated
with the output data signal to facilitate interfacing with other video
receiver networks. Finally, the output data from unit 125 is processed by
MPEG compatible transport processor 130 to provide synchronization and
error indication information used in the video data decompression,
25   although MPEG compatibility is not essential in a system employing the
invention. Transport processor 130 also separates data according to type
based on an analysis of header information. The data output from
processor 130 is decompressed by MPEG decompressor 135 to provide
video data suitable for encoding as an NTSC format signal by NTSC
30   encoder 140. The encoded decompressed output data from unit 140 is
provided to display processing circuits including a display device (not
shown).

In the embodiment of Figure 2, demodulator 10 and decoder
35   12 of Figure 1 are configured via the Control signal to process the DSS
satellite signal format. The networks shown in Figure 2 perform the same
functions as previously described in connection with Figure 1. In this DSS
mode, the demodulator 10 AGC loop (discussed in connection with Figure
5 and 6) uses the QPSK slicer output via multiplexer 40. The resultant

gain-controlled, filtered, digital video signal output from unit 25 is then processed, Viterbi decoded and error corrected by decoder 12 units 50 and 60. In this DSS mode unit 50 may be configured for either the 2/3 or 6/7 code rate as defined earlier. The resultant Viterbi decoded output

5   from unit 60 is passed via multiplexer 65 to symbol to byte mapper 70. The output of mapper 70 is deinterleaved by units 75, 85, 90 and 95 which are configured, for example, for the Ramsey deinterleaver function. The deinterleaved output from memory 95 is decoded by Reed-Solomon decoder 110 and passed via multiplexer 120 to output processor 125. The

10   decoded, demodulated output from processor 125 is processed by networks 130, 135 and 140 as described in connection with Figure 1.

       In the embodiment of Figure 3, demodulator 10 and decoder 12 of Figure 1 are configured via the Control signal to process the DVB

15   satellite signal format. The networks shown in Figure 3 perform the same functions as previously described in connection with Figure 1. In this DVB satellite mode as in the DSS mode, the demodulator 10 AGC loop uses the QPSK slicer output via multiplexer 40. The resultant gain-controlled, filtered, digitized video signal output from unit 25 is then processed,

20   Viterbi decoded and error corrected by decoder 12 units 50 and 60. In this DVB mode, in contrast to the DSS mode, unit 50 may be configured for five different code rates (1/2, 2/3, 3/4, 5/6, and 7/8 rates). The resultant Viterbi decoded output from unit 60 is passed via multiplexer 65 to symbol to byte mapper 70. The mapper 70 output is deinterleaved

25   by units 75, 80, 90 and 95 which are configured for the Forney deinterleaver function. The deinterleaved output from memory 95 is decoded by Reed-Solomon decoder 110, descrambled by unit 115 and then passed via multiplexer 120 to output processor 125. The decoded, demodulated output from processor 125 is processed by networks 130,

30   135 and 140 as described in connection with Figure 1.

       In the embodiment of Figure 4, demodulator 10 and decoder 12 of Figure 1 are configured via the Control signal to receive the DVB cable signal format. The networks shown in Figure 4 perform the same

35   functions as previously described in connection with Figure 1. In this DVB cable mode the demodulator 10 AGC loop uses the QAM slicer output via multiplexer 40. The QAM slicer is configured either for a 64 or 256 point symbol constellation depending on the input signal to demodulator 10. The resultant data recovered by the selected slicer configuration at the

output of multiplexer 40 is differentially decoded by unit 45 and provided to multiplexer 65 of decoder 12. The decoded output of unit 45 is passed via multiplexer 65 to symbol to byte mapper 70. The mapper 70 output is deinterleaved by units 75, 80, 90 and 95 which are

5 configured, for example, for the Forney deinterleaver function. The deinterleaved output from memory 95 is decoded by Reed-Solomon decoder 110, descrambled by unit 115 and passed via multiplexer 120 to output processor 125. The decoded, demodulated output from processor 125 is processed by networks 130, 135 and 140 as described in

10 connection with Figure 1.

Both the demodulator 10 and decoder 12 functions and the means for configuring and selecting these functions may be implemented in a variety of ways. For example, instead of using multiplexers for

15 selecting functions, a configurable logic network could be used to perform these functions. Alternatively, a tri-state logic buffering scheme could be employed to select between separate function outputs instead of using multiplexers for the selection. In addition, by applying the principles of the invention, the functions themselves may be varied to provide

20 decoding and demodulation of other input signal formats.

19

CLAIMS

1. In a system for receiving and adaptively processing a carrier modulated with video information in one of a plurality of different modulation formats suitable for satellite, terrestrial or cable transmission, an adaptive demodulator network comprising:

a timing recovery network (25) for recovering timing data from said modulated carrier; and

an adaptive carrier recovery network (25) responsive to said timing data for recovering said video information; and

a selectable slicer network (30,35,40), included in said carrier recovery network, for applying a set of decision thresholds to data provided by said carrier recovery network to recover said video information, said set of decision thresholds being selected from a plurality of sets of decision thresholds.

2. A system according to claim 1, further including

an Automatic Gain Control (AGC) network (25;270) providing a gain control output as a function of a difference between a signal produced before said slicer network and a signal produced after said slicer network.

3. A system according to claim 1, wherein

said timing recovery network includes a configurable filter for compensating for variations in Excess Bandwidth of said modulated carrier.

4. A system according to claim 1, wherein

said selectable slicer network applies decision thresholds appropriate for PAM, QPSK or QAM symbol constellations.

5. A system according to claim 1, wherein

the modulation format of said video information uses a symbol constellation containing a plurality of symbol points.

6. A system according to claim 1, wherein
said carrier recovery network further includes a selectable equalizer network (220) for compensating for errors associated with a transmission channel, wherein the configuration of said equalizer filter network is selected in accordance with the modulation format of said modulated carrier.

7. A system according to claim 6, wherein
said selectable equalizer network includes a Feed Forward Equalizer filter and a Decision Feedback Equalizer.

8. A system according to claim 1, further including
a differential decoder (45) for differentially decoding a signal produced by said carrier recovery network.

9. A system according to claim 1, wherein
said carrier recovery network is capable of operating at different clock rates.

10. A system according to claim 1, further including
a signal quality detector (275) providing as an output an estimate of error occurring in recovered video information.

11. A system according to claim 10, wherein
said adaptive carrier recovery network is automatically configured to be compatible with the modulation format of said video modulated carrier in response to said error estimate.

12. A system according to claim 10, wherein
said estimate of error is a function of the sum of the squares of quadrature components of a signal processed by said carrier recovery network.

13. A system according to claim 10, wherein

said estimate of error is a function of the difference between a first and a second value, wherein

said first value represents the sum of the squares of quadrature components of a signal input to said slicer network and

said second value represents the sum of the squares of quadrature components of an output signal from said slicer network.

14. In a receiver for adaptively processing an input signal containing data in one of a plurality of different input formats and wherein said data is encoded in one of a plurality of different coding formats, apparatus comprising:

an adaptive timing recovery network (25) for recovering timing information from said input signal as a function of a received input signal format;

an adaptive data recovery network (25) responsive to said timing information for recovering said data;

a selectable slicer network (30,35,60), included in said data recovery network, for applying a set of decision thresholds to data provided by said data recovery network to recover said data, said set of decision thresholds being selected from a plurality of sets of decision thresholds; and

an adaptive decoder (12) for selectively decoding said recovered data as a function of a received data coding format to produce recovered and decoded output data.

15. Apparatus according to claim 14, wherein

said input signal is a carrier modulated with said data and said input formats are modulating formats and said modulating and coding formats are suitable for satellite, terrestrial or cable transmission; and

said data recovery network is a carrier recovery network.

16. Apparatus according to claim 15 or 18, further including

a signal quality detector (275) providing as an output an estimate of error occurring in said recovered and decoded output data.

17. Apparatus according to claim 16, wherein
said adaptive receiver is automatically configured to be compatible with said received carrier modulation format in response to said error estimate.

18. A receiver for adaptively processing a carrier modulated with video data in one of a plurality of different modulation formats and wherein said modulating video data is encoded in one of a plurality of different formats, comprising:

an adaptive timing recovery network (25) for recovering timing data from said modulated carrier as a function of a received carrier modulation format;

an adaptive carrier recovery network (25) responsive to said timing data for recovering modulating data from said modulated carrier;

a selectable slicer network(30,35,40), included in said carrier recovery network, for applying a set of decision thresholds to data provided by said carrier recovery network to recover said modulating data, said set of decision thresholds being selected from a plurality of sets of decision thresholds;

an adaptive Viterbi decoder (50,60) for Viterbi decoding said recovered modulating data and providing a Viterbi decoded output as a function of a received data encoding format;

an adaptive deinterleaver (80,85,90) for deinterleaving said Viterbi decoded output and providing an output in accordance with a deinterleaving function selected from a plurality of deinterleaving functions;

an adaptive error processor (110) responsive to said deinterleaved output; and

a descrambler (115) for descrambling an output from said error processor.

AMENDED CLAIMS
[received by the International Bureau on 12 November 1996 (12.11.96);
original claims 1, 8, 10. 14 and 18 amended;
remaining claims unchanged (5 pages)]

1. In a system for receiving and adaptively processing a
5 carrier modulated with video information in one of a plurality of
different modulation formats suitable for satellite, terrestrial or
cable transmission, an adaptive demodulator network comprising:
        a timing recovery network (25) for recovering timing data
from said modulated carrier;
10   an adaptive carrier recovery network (25) responsive to
said timing data for recovering said video information from said
carrier in said different modulation formats; and
        a selectable slicer network (30,35,40), included in said
carrier recovery network, for applying a set of decision thresholds
15 to data provided by said carrier recovery network to recover said
video information, said set of decision thresholds being selected
from a plurality of sets of decision thresholds suitable for said
different modulation formats.

20   2. A system according to claim 1, further including
        an Automatic Gain Control (AGC) network (25;270) providing
a gain control output as a function of a difference between a signal
produced before said slicer network and a signal produced after
said slicer network.
25

        3. A system according to claim 1, wherein
        said timing recovery network includes a configurable filter
for compensating for variations in Excess Bandwidth of said
modulated carrier.
30

        4. A system according to claim 1, wherein
        said selectable slicer network applies decision thresholds
appropriate for PAM, QPSK or QAM symbol constellations.

AMENDED SHEET (ARTICLE 19)

5. A system according to claim 1, wherein
the modulation format of said video information uses a
symbol constellation containing a plurality of symbol points.
5

6. A system according to claim 1, wherein
said carrier recovery network further includes a selectable
equalizer network (220) for compensating for errors associated
with a transmission channel, wherein the configuration of said
10 equalizer filter network is selected in accordance with the
modulation format of said modulated carrier.

7. A system according to claim 6, wherein
said selectable equalizer network includes a Feed Forward
15 Equalizer filter and a Decision Feedback Equalizer.

8. A system according to claim 1, further including
a selectable differential decoder (45) for differentially
decoding a signal produced by said carrier recovery network.
20

9. A system according to claim 1, wherein
said carrier recovery network is capable of operating at
different clock rates.

25   10. A system according to claim 1, further including
a signal quality detector (275) providing as an output an
estimate of error occurring in said recovered video information
obtained from said different modulation formats.

30   11. A system according to claim 10, wherein
said adaptive carrier recovery network is automatically
configured to be compatible with the modulation format of said
video modulated carrier in response to said error estimate.

AMENDED SHEET (ARTICLE 19)

12. A system according to claim 10, wherein
said estimate of error is a function of the sum of the squares
of quadrature components of a signal processed by said carrier
5 recovery network.

13. A system according to claim 10, wherein
said estimate of error is a function of the difference between
a first and a second value, wherein
10   said first value represents the sum of the squares of
quadrature components of a signal input to said slicer network
and
said second value represents the sum of the squares of
quadrature components of an output signal from said slicer
15 network.

14. In a receiver for adaptively processing an input signal
containing data in one of a plurality of different input formats and
wherein said data is encoded in one of a plurality of different
20 coding formats, apparatus comprising:
an adaptive timing recovery network (25) for recovering
timing information from said input signal as a function of a
received input signal format;
an adaptive data recovery network (25) responsive to said
25 timing information for recovering said data;
a selectable slicer network (30,35,60), included in said data
recovery network, for applying a set of decision thresholds to data
provided by said data recovery network to recover said data, said
set of decision thresholds being selected from a plurality of sets of
30 decision thresholds suitable for said different input formats; and
an adaptive decoder (12) for selectively decoding said
recovered data as a function of a received data coding format to
produce recovered and decoded output data.

AMENDED SHEET (ARTICLE 19)

15. Apparatus according to claim 14, wherein
said input signal is a carrier modulated with said data and
said input formats are modulating formats and said modulating
5 and coding formats are suitable for satellite, terrestrial or cable
transmission; and
said data recovery network is a carrier recovery network.

16. Apparatus according to claim 15 or 18, further including
10 a signal quality detector (275) providing as an output an
estimate of error occurring in said recovered and decoded output
data.

17. Apparatus according to claim 16, wherein
15 said adaptive receiver is automatically configured to be
compatible with said received carrier modulation format in
response to said error estimate.

18. A receiver for adaptively processing a carrier modulated
20 with video data in one of a plurality of different modulation
formats and wherein said modulating video data is encoded in one
of a plurality of different formats, comprising:
an adaptive timing recovery network (25) for recovering
timing data from said modulated carrier as a function of a
25 received carrier modulation format;
an adaptive carrier recovery network (25) responsive to
said timing data for recovering modulating data from said
modulated carrier;
a selectable slicer network (30,35,40), included in said
30 carrier recovery network, for applying a set of decision thresholds
to data provided by said carrier recovery network to recover said
modulating data, said set of decision thresholds being selected
from a plurality of sets of decision thresholds suitable for said
different modulation formats;

AMENDED SHEET (ARTICLE 19)

an adaptive Viterbi decoder (50,60) for Viterbi decoding said recovered modulating data and providing a Viterbi decoded output as a function of a received data encoding format;

an adaptive deinterleaver (80,85,90) for deinterleaving said
5 Viterbi decoded output and providing an output in accordance with a deinterleaving function selected from a plurality of deinterleaving functions;

an adaptive error processor (110) for error correcting said deinterleaved output to provide an error corrected output; and
10   a descrambler (115) for descrambling said error corrected output.
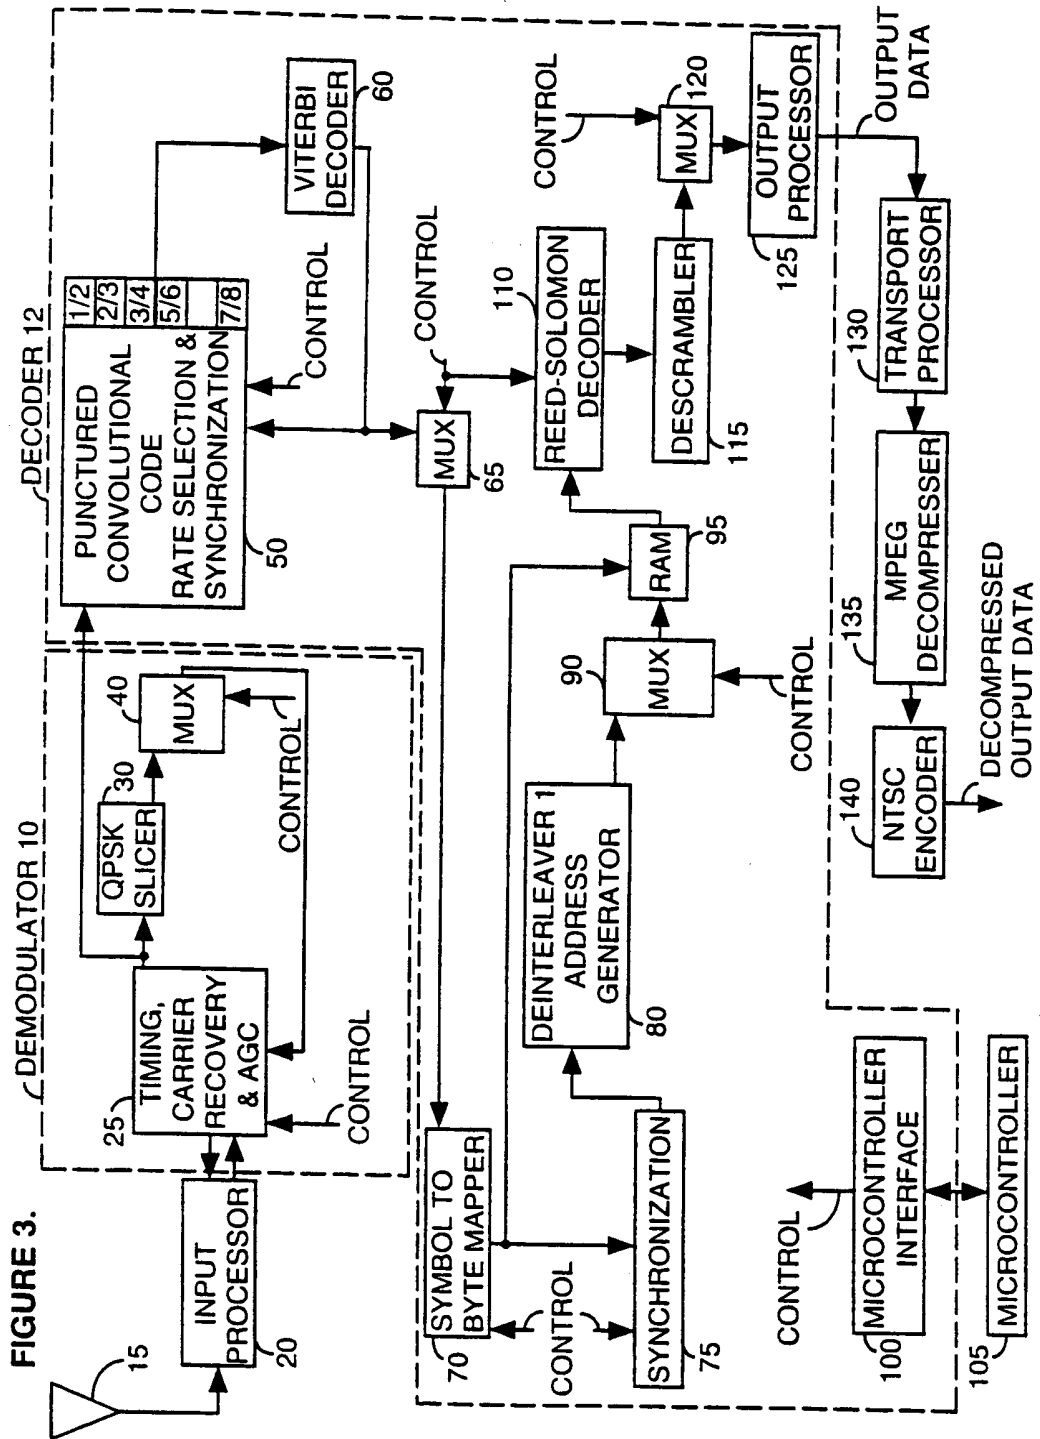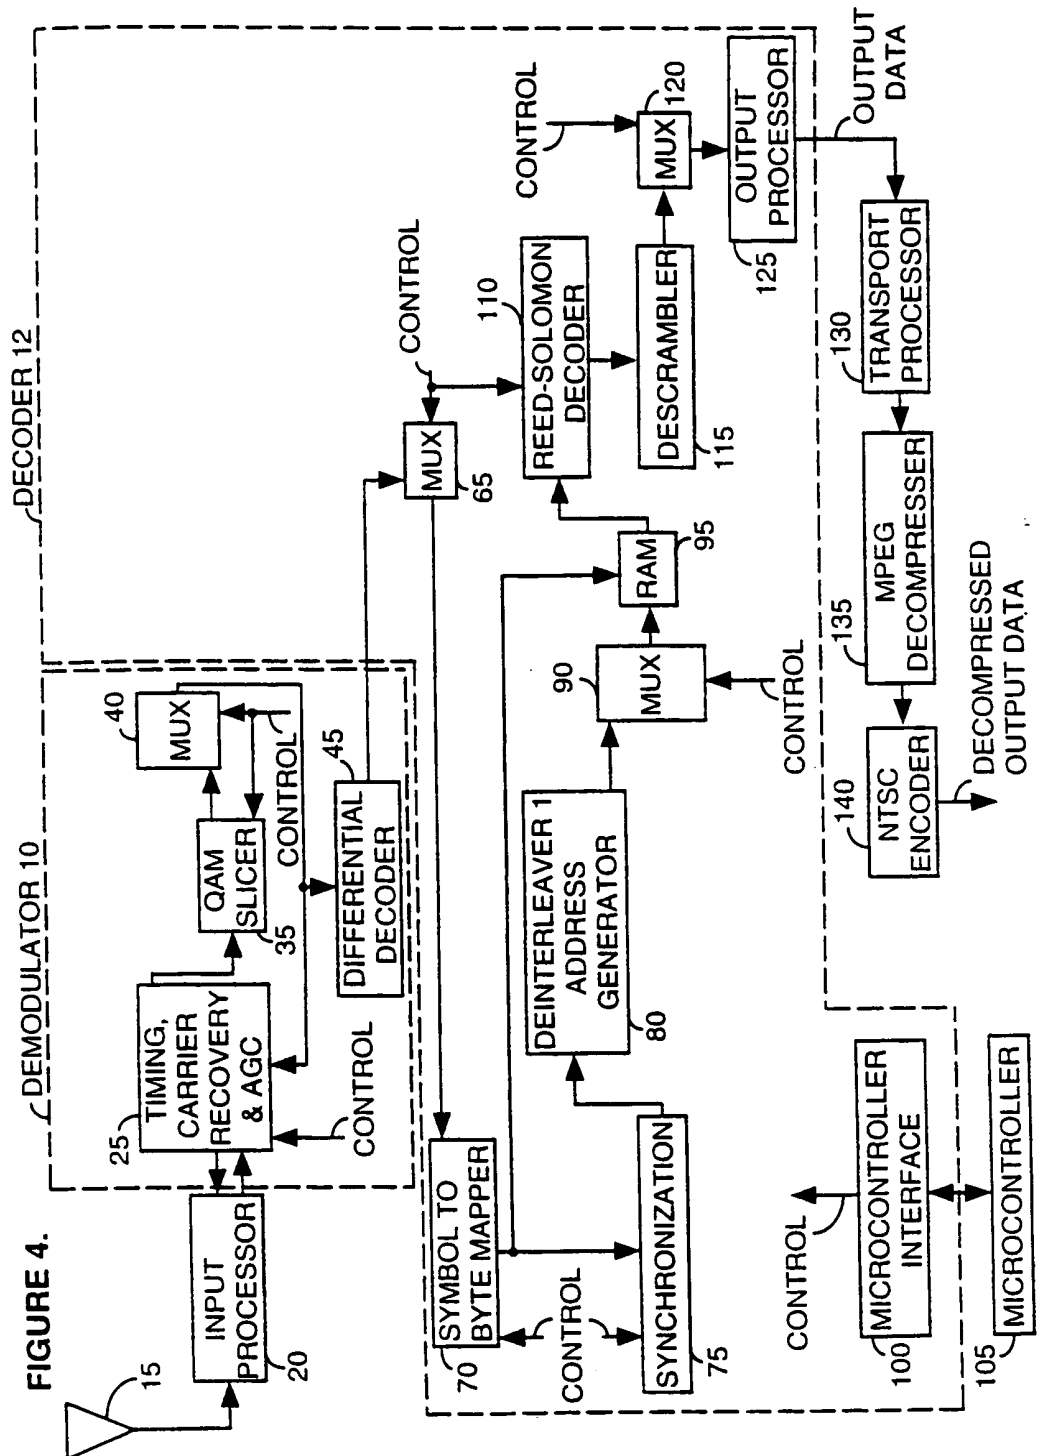
AMENDED SHEET (ARTICLE 19)
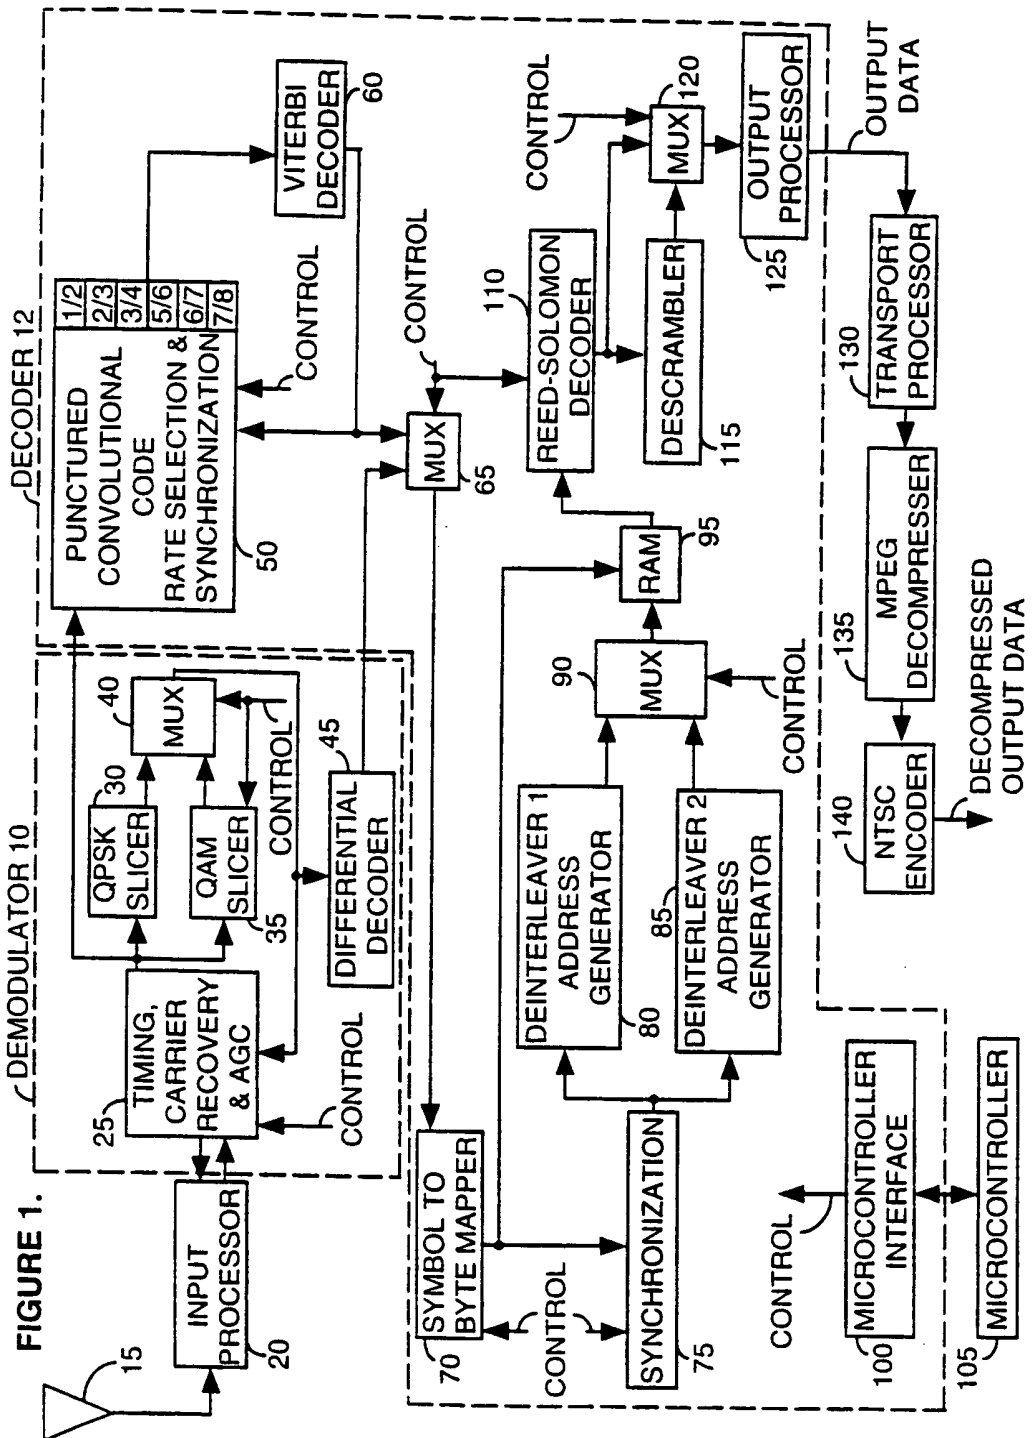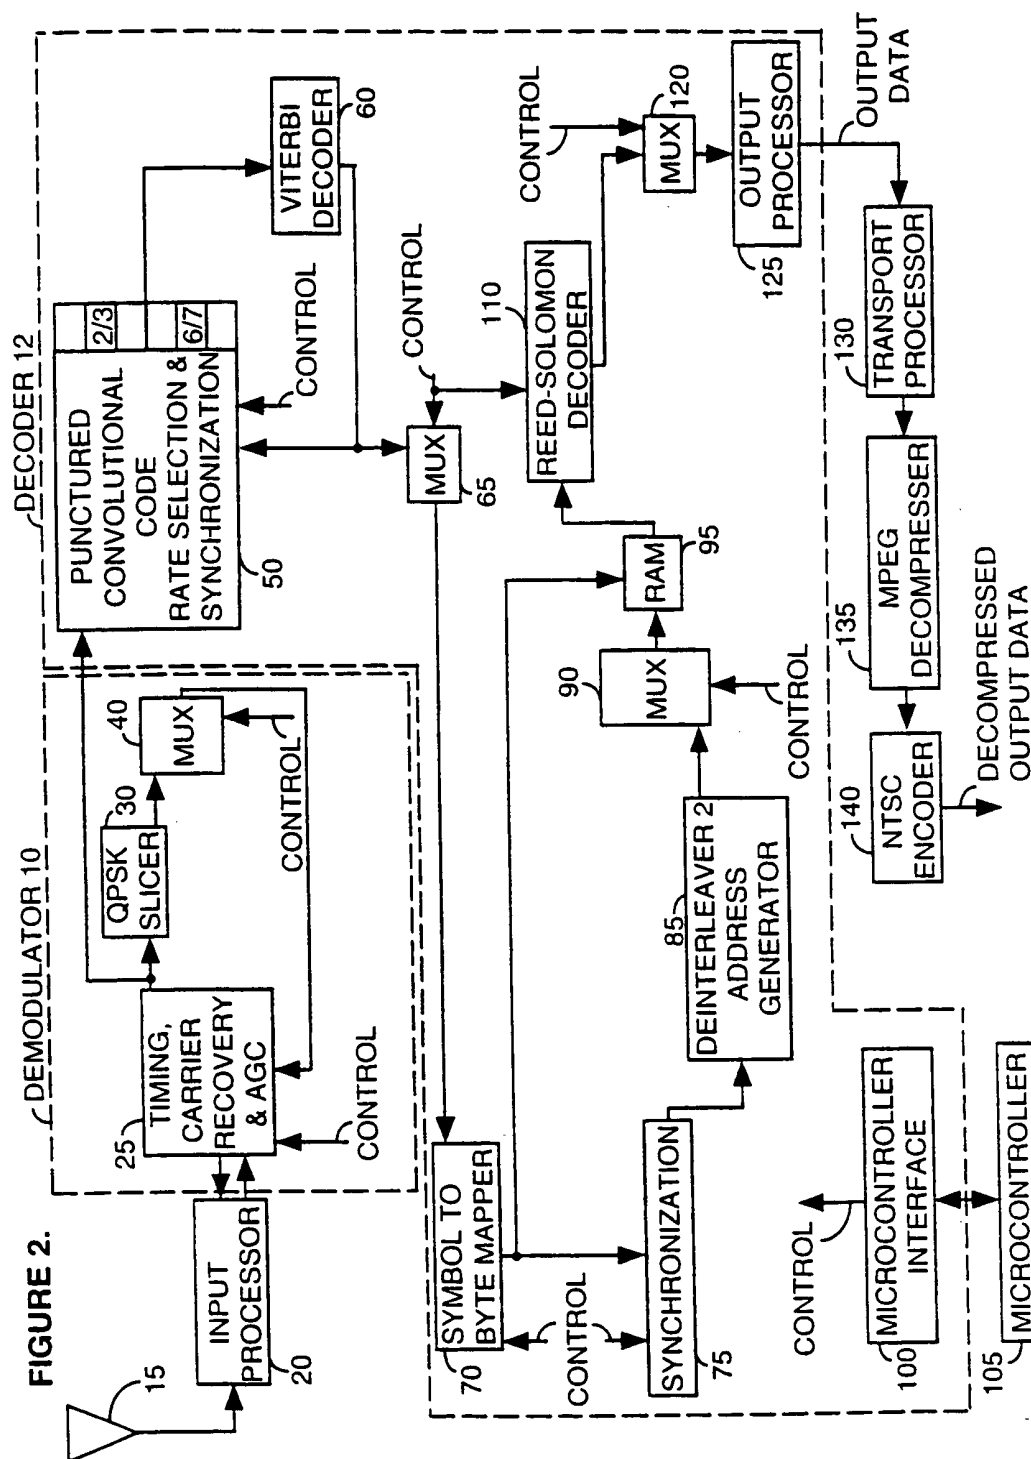
FIGURE 1.

2/6

FIGURE 2.

FIGURE 3.

FIGURE 4.

FIGURE 5.

6/6
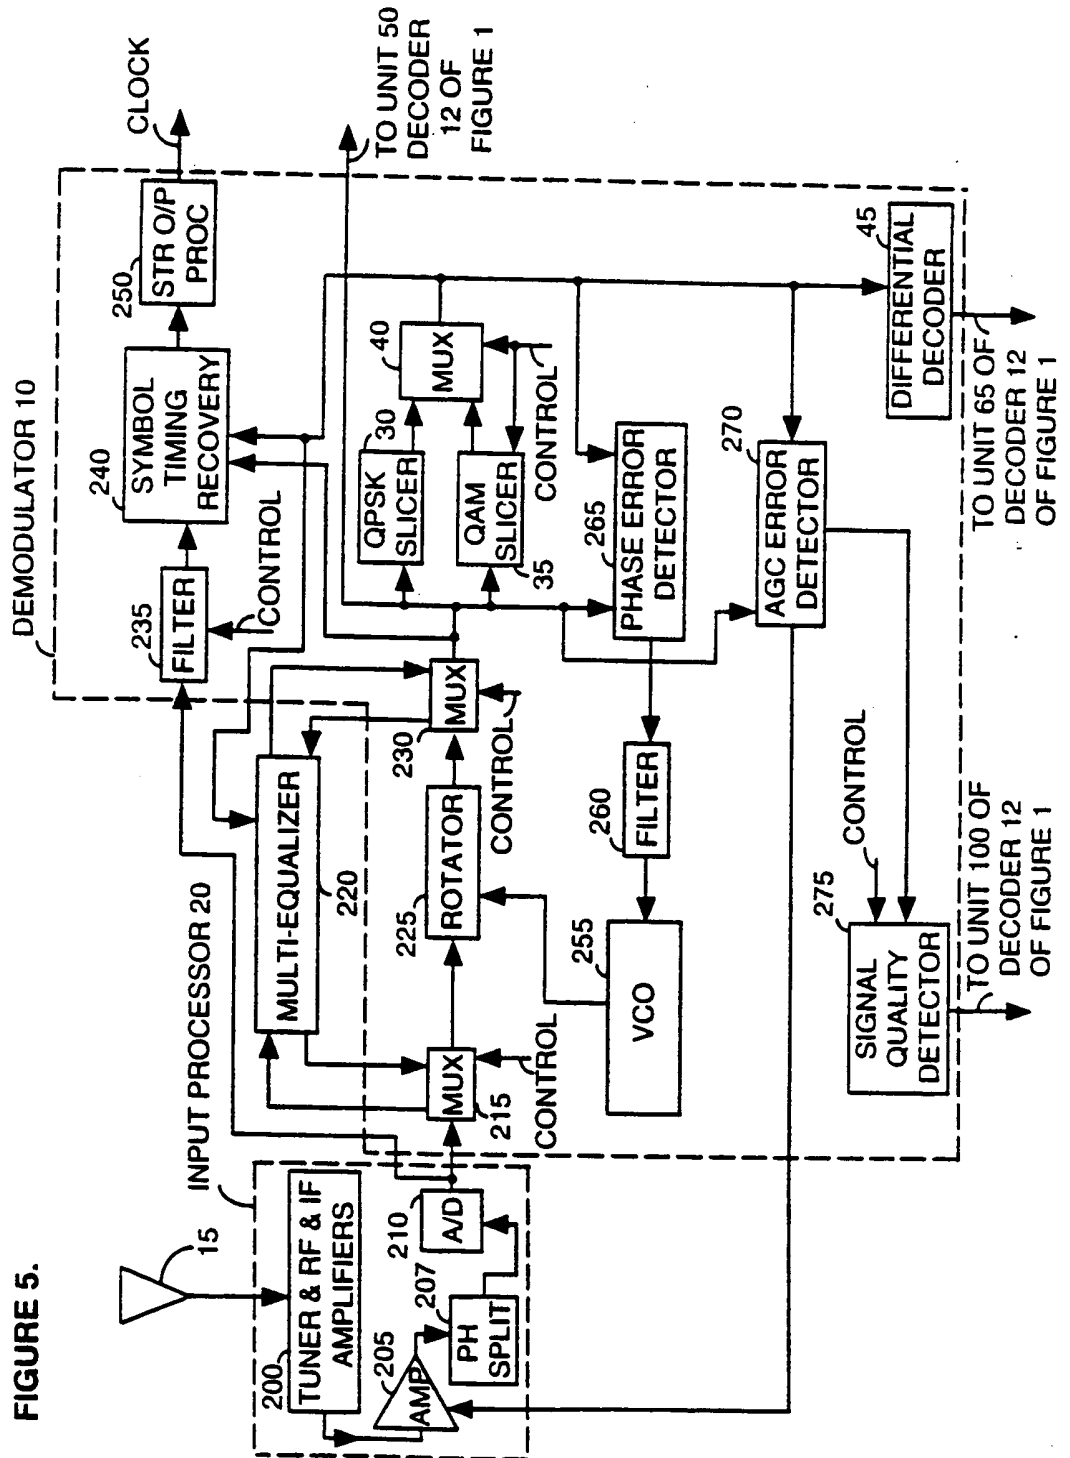
FIGURE 6.
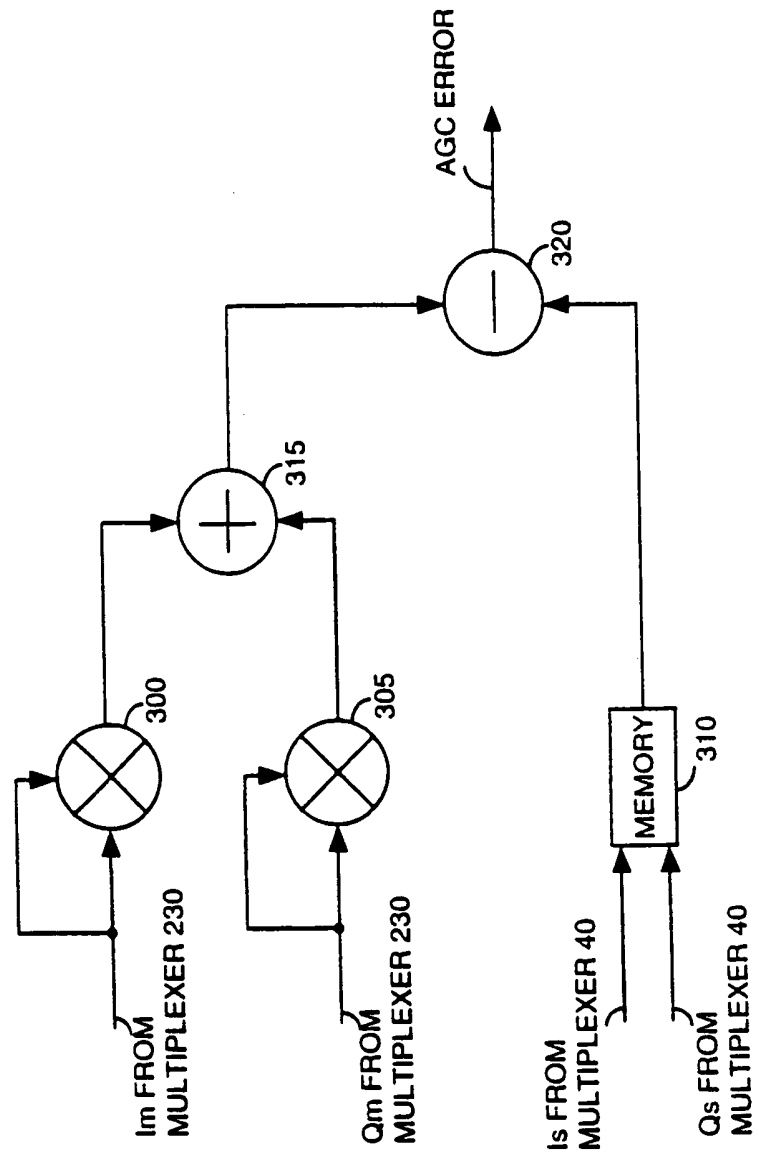
INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6)   :H04L 27/06, 27/22, 27/08, 7/00
US CL   :375/326, 331, 341, 345; 348/475; 329/304

According to International Patent Classification (IPC) or to both national classification and IPC

B.   FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. :   375/261, 262, 265, 266, 233, 281, 326, 329, 330, 331, 340, 341, 345, 355; 348/475, 426; 329/304

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

C.   DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P ---- Y,P	D.Bryan "QAM For Terrestrial And Cable Transmission" IEEE transactions on consumer Electronics, Vol. 41, No.3, August 1995, see figures 5 and 6.	1-5,9,10,12 ----------- 8,12-16,18
Y	US, A, 5,386,239 (Wang et al.) 31 January 1995, see figure 1.	8,12-16, 18

☐ Further documents are listed in the continuation of Box C.   ☐   See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	
"E" earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
16 AUGUST 1996	**17 SEP 1996**
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231	Authorized officer TESFALDET BOCURE
Facsimile No. (703) 305-3230	Telephone No. (703) 305-4735

Form PCT/ISA/210 (second sheet)(July 1992)*

B. FIELDS SEARCHED
Electronic data bases consulted (Name of data base and where practicable terms used):

USPTO APS: (quadrature amplitude modulat? or qam) and (qpsk or quadrature phase shift key?) and
(plural(2a)demodulat) and (satelit and terrestrial and cable) and (carrier(2a)recover? and timing(2a)recover?)

Form PCT/ISA/210 (extra sheet)(July 1992)*